


tillex[®]



NEW STELLA UNIVERSAL PLUG

***UNIVERSAL PLUG SUITABLE FOR NEARLY
ALL BUILDING MATERIALS***

MADE OF 100% RECYCLED NYLON




SKELSTEDET 1 A • 2950 VEDBAEK
DENMARK • TEL. +45 45 89 12 66
TILLEX@TILLEX.DK • WWW.TILLEX.COM

A HIGHLY EFFECTIVE UNIVERSAL PLUG FOR FIXING HEAVY LOADS TO PLASTERBOARD AND SOLID MATERIALS


Material: High quality recycled Nylon (Polyamid 6).

Halogen free and withstand temperatures from -40°C to $+80^{\circ}\text{C}$


Screw: Strong screw, steel quality 8.8, zinc plated, min. 5 my.




AERATED
CONCRETE




CONCRETE




PLASTERBOARD
(13mm)



PLASTERBOARD
(26mm)







HOLLOW BRICK



CAVITY WALL



PRODUCT RANGE


Ref. nr.	Type	Screw (mm)	Colour	Plug Length (mm)	Panel Thickness (mm)	Drill Ø	Box Qty
333000	ST UNIVERSAL PAN TORX 25	5X65 	Grey	59	1-28	10	25
333024	ST UNIVERSAL PAN PZ2	5X65 	Grey	59	1-28	10	25
333048	ST UNIVERSAL UHJ TORX 25	5X75 	Grey	59	1-28	10	25
333062*	ST UNIVERSAL UHJ PZ2	5X75 	Grey	59	1-28	10	25
333123	ST UNIVERSAL EYE*	5x55	Grey	59	1-28	10	15
333130	ST UNIVERSAL HOOK*	5x55	Grey	59	1-28	10	15
333147	ST UNIVERSAL ANGLE*	5x55	Grey	59	1-28	10	15

*Only to be fixed by hand in concrete and solid bricks

LOAD CAPACITY

MATERIAL	MAX LOAD
CONCRETE C 20/25	110 KG
AERATED CONCRETE G4	45 KG
PLASTERBOARD (13mm)	25 KG
PLASTERBORD (26 mm)	45 KG


- Safety factor 3 is included
- High load capacity
- Easy fixing – needs NO special tools
- Equally effective for insulated cavities
- Will not damage the plasterboard
- Encapsulated metal nut for high strength
- Plug is removable



PROFESSIONALS CHOOSE TILLEX

MADE IN DENMARK SINCE 1954...

tillex[®]

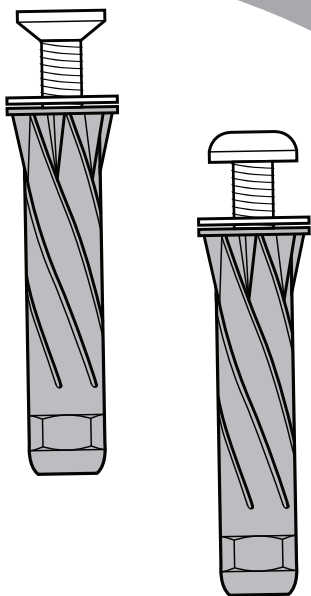

SKELSTEDET 1 A • 2950 VEDBAEK
DENMARK • TEL. +45 45 89 12 66
TILLEX@TILLEX.DK • WWW.TILLEX.COM