


# STELLA PLUGS FOR 2 LAYERS PLASTERBOARDS

**Material:** High quality recycled Nylon (Polyamid 6). Halogen free, withstand temperatures from -40 °C to +80°C. Screw: Steel quality 4.8, zinc plated, min. 5 µm.

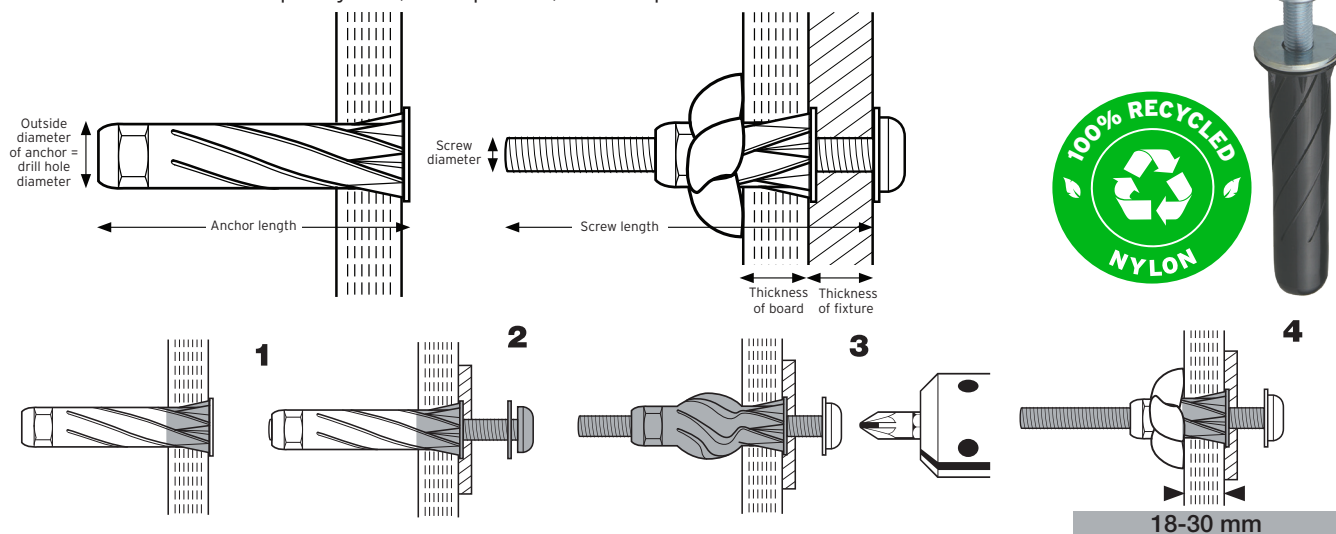


Ref. No.	Type	EAN	Screw (mm)	Pieces/Box
330045	ST Black Pan Torx 25	5701925253186	5x65	25
330047	ST Black Pan Torx 25	5701925251489	5x90	25
330051	ST Black Pan PZ2	5701925251687	5x65	25
330053	ST Black Pan PZ2	5701925253285	5x90	25
330056	ST Black UHJ Torx 25	5701925251885	5x75	25
330058	ST Black UHJ Torx 25	5701925253384	5x90	25
330061	ST Black Collum Torx 25	5701925252080	5x75	25
330066	ST Black Eye	5701925252486	5x55	25
330071	ST Black Hook	5701925252684	5x55	25
330076	ST Black Angle	5701925252882	5x55	25
330054	Stella Black 10x59 without screw	5701925330054		50

Stella Plugs Black				Dimensions					Fitting			Load capacity*
Type	Assortment	Bit	Ref. No.	Outside Ø of anchor mm	Anchor length, mm	Screw Ø, mm	Screw L, mm	Thickness of fixture mm	Drill hole Ø mm	Thickness of fixture mm	Board layers	Recommended tension load kg
Black Pan		-	330054	10	59	M5	-	0	10	18-30	2	20
Black Pan		Torx 25	330045	10	59	M5	65	12	10	18-30	2	45
			330047	10	59	M5	90	38	10	18-30	2	45
Black Pan		PZ2	330051	10	59	M5	65	12	10	18-30	2	45
			330053	10	59	M5	90	38	10	18-30	2	45
Black UHJ		Torx 25	330056	10	59	M5	75	23	10	18-30	2	45
			330058	10	59	M5	90	38	10	18-30	2	45
Black Collum		Torx 25	330061	10	59	M5	75	12	10	18-30	2	45
Black Eye (Ø13mm)			330066	10	59	M5	55	0	10	18-30	2	20
Black Hook (Ø 13mm)			330071	10	59	M5	55	0	10	18-30	2	20
Black Angle			330076	10	59	M5	55	0	10	18-30	2	20


**Note:** The cavity must be at least as wide as the larger of either 1) Anchor length less thickness of board, or 2) Screw length less thickness of board and fixture. **\*Load capacity** is the recommended maximum load in plasterboards with 300 mm spacing between each Stella plug. **Safety factor 3** is included. 1 kN ≈ 100 kg. **Note:** If recommended dimensions and spacings cannot be respected, the load capacity is reduced.

# DIMENSIONS


REF. 330045  
ST BLACK PAN TORX 25

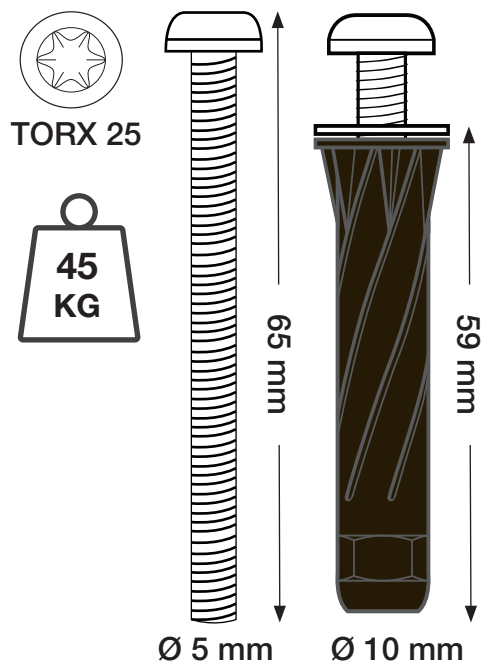


REF. 330047  
ST BLACK PAN TORX 25

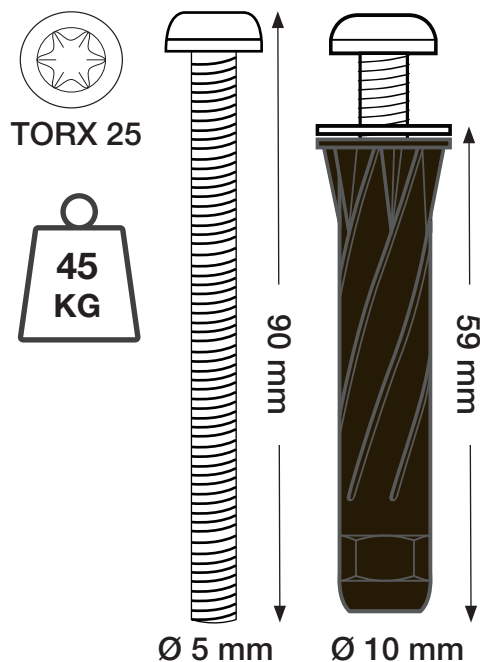

REF. 330051  
ST BLACK PAN PZ2

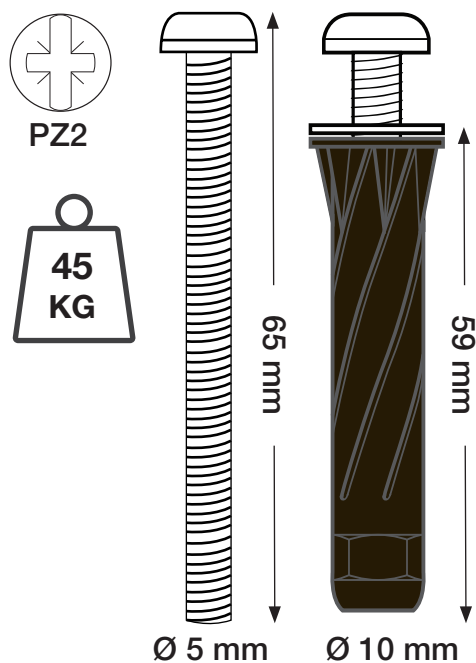


REF. 330053  
ST BLACK PAN PZ2

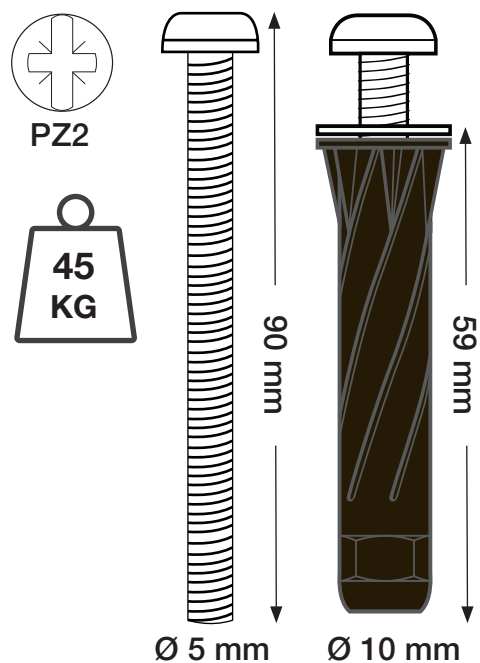


# DIMENSIONS


REF. 330056  
ST BLACK UHJ TORX 25

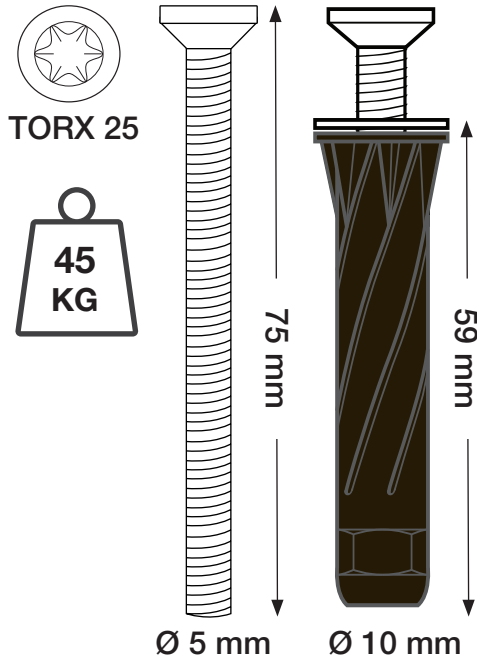


REF. 330058  
ST BLACK UHJ TORX 25

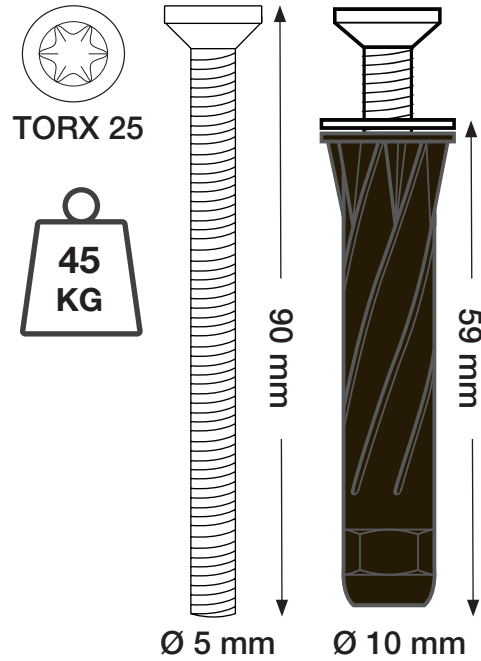

REF. 330061  
ST BLACK COLLUM TORX 25

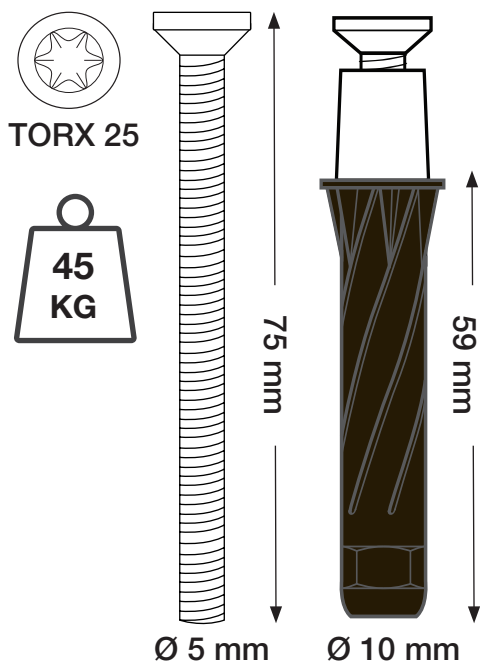


REF. 330066  
ST BLACK EYE\*

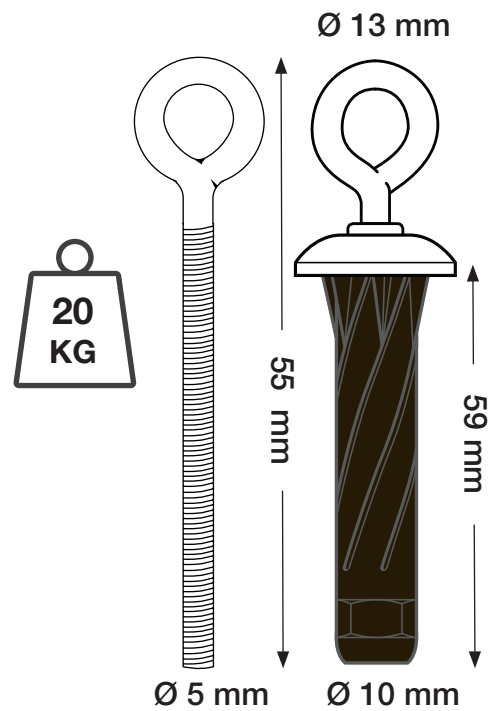

\*If load recommendations not applied, eye may open.


# DIMENSIONS

REF. 330071  
ST BLACK HOOK\*

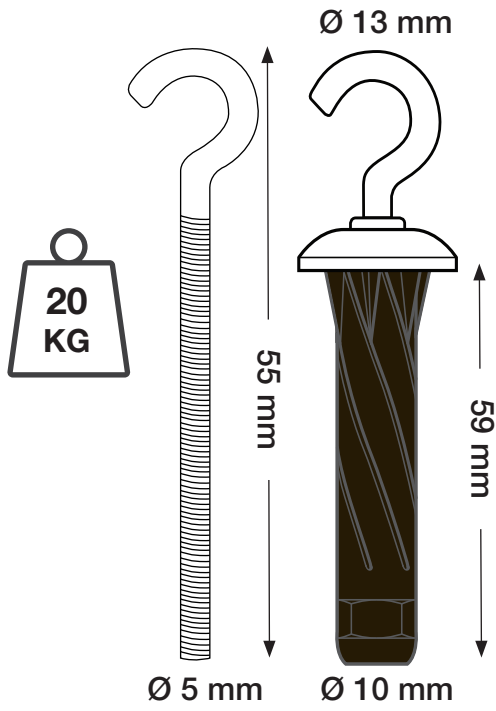

\*If load recommendations not applied, hook may open.

REF. 330076  
ST BLACK ANGLE\*

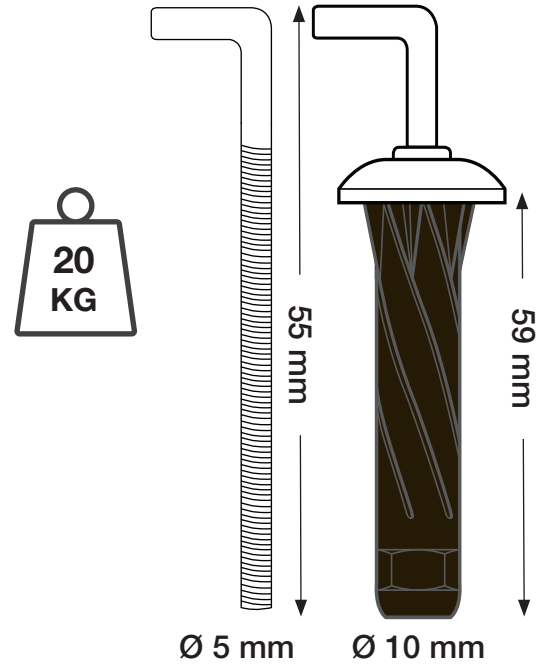

\*If load recommendations not applied, angle may bend.