


STELLA PLUGS FOR 1 LAYER PLASTERBOARD

Material: High quality recycled Nylon (Polyamid 6). Halogen free and withstand temperatures from -40 °C to +80°C. Screw: Strong screw, steel quality 4.8, zinc plated, min. 5 µm.

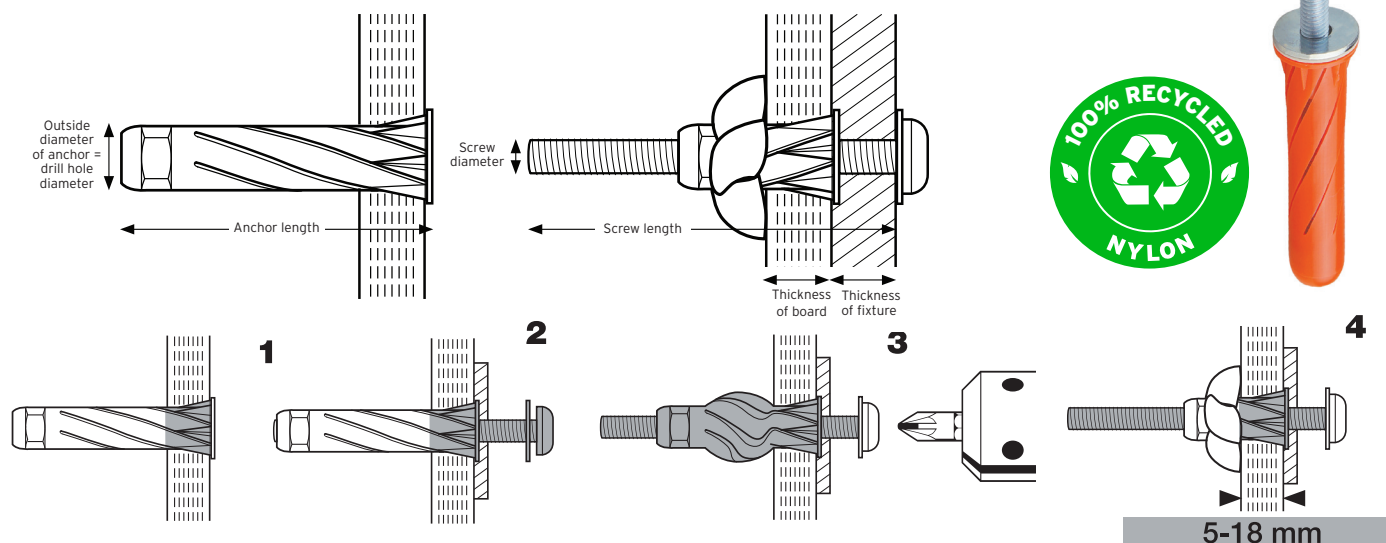


Ref. No.	Type	EAN	Screw	Pieces/Box
330005	ST Red Pan Torx 25	5701925252844	5x55 mm	25
330007	ST Red Pan Torx 25	5701925251342	5x80 mm	25
330011	ST Red Pan PZ2	5701925251540	5x55 mm	25
330013	ST Red Pan PZ2	5701925252943	5x80 mm	25
330016	ST Red UHJ Torx 25	5701925251748	5x65 mm	25
330018	ST Red UHJ Torx 25	5701925253049	5x80 mm	25
330021	ST Red Collum Torx 25	5701925251946	5x65 mm	25
330026	ST Red Eye	5701925252349	5x55 mm	25
330031	St Red Hook	5701925252547	5x55 mm	25
330036	St Red Angle	5701925252745	5x55 mm	25
330009	Stella Red 10x49 without screw	5701925330009		50

Stella Plugs Red				Dimensions					Fitting			Load capacity*
Type	Assortment	Bit	Ref. No.	Outside Ø of anchor mm	Anchor length, mm	Screw Ø, mm	Screw L, mm	Thickness of fixture mm	Drill hole Ø mm	Thick-ness of fixture mm	Board layers	Recommended tension load kg
Red Pan		-	330009	10	49	M5	-	0	10	5-18	1	20
Red Pan		Torx 25	330005	10	49	M5	55	15	10	5-18	1	25
			330007	10	49	M5	80	40	10	5-18	1	25
Red Pan		PZ2	330011	10	49	M5	55	15	10	5-18	1	25
			330013	10	49	M5	80	40	10	5-18	1	25
Red UHJ		Torx 25	330016	10	49	M5	65	25	10	5-18	1	25
			330018	10	49	M5	80	40	10	5-18	1	25
Red Collum		Torx 25	330021	10	49	M5	65	12	10	5-18	1	25
Red Eye (Ø13mm)			330026	10	49	M5	55	0	10	5-18	1	20
Red Hook (Ø 13mm)			330031	10	49	M5	55	0	10	5-18	1	20
Red Angle			330036	10	49	M5	55	0	10	5-18	1	20


Note: The cavity must be at least as wide as the larger of either 1) Anchor length less thickness of board, or 2) Screw length less thickness of board and fixture. ***Load capacity** is the recommended maximum load in plasterboards with 300 mm spacing between each Stella plug. **Safety factor 3** is included. 1 kN ≈ 100 kg. **Note:** If recommended dimensions and spacings cannot be respected, the load capacity is reduced.

DIMENSIONS


REF. 330005
ST RED PAN TORX 25

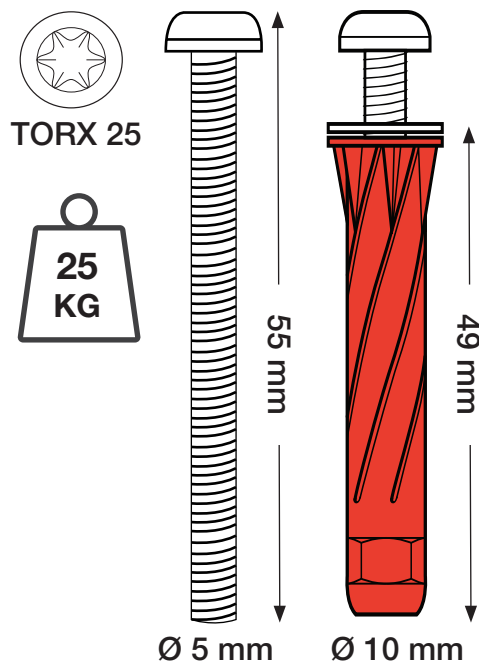


REF. 330007
ST RED PAN TORX 25

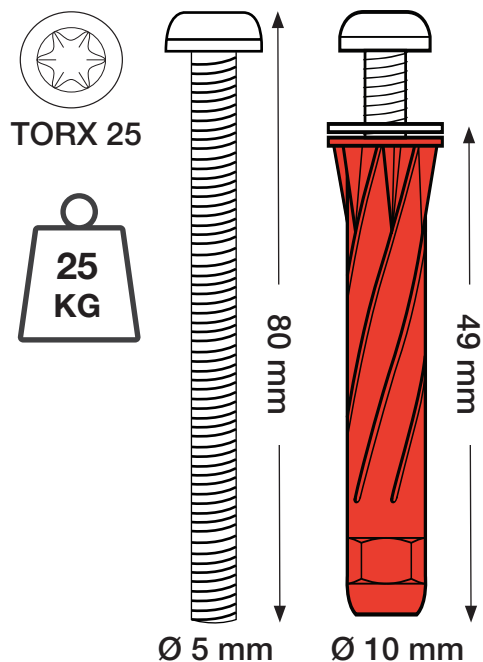

REF. 330011
ST RED PAN PZ2

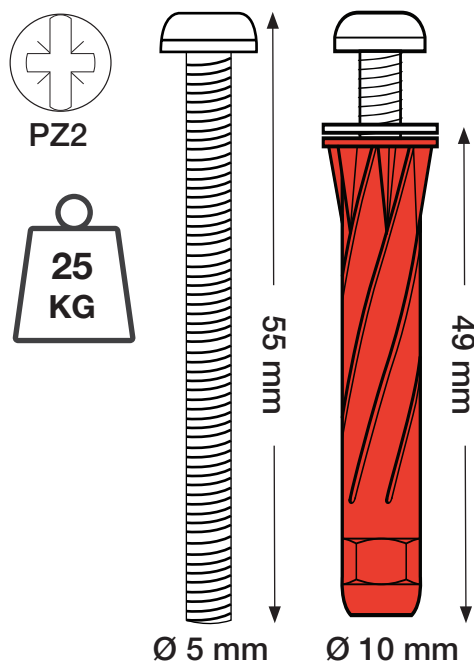


REF. 330013
ST RED PAN PZ2

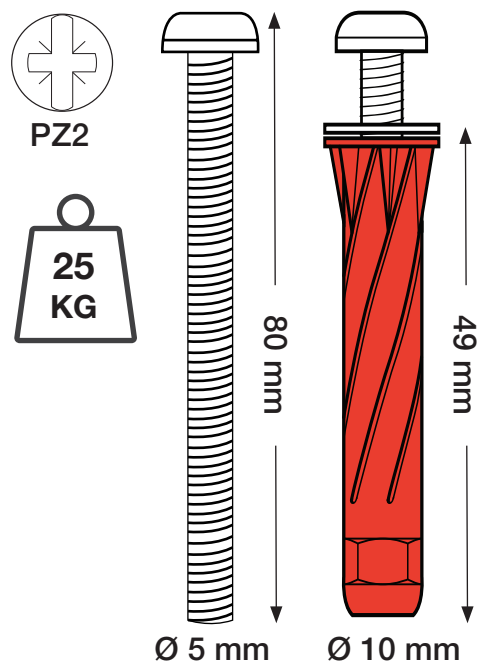


DIMENSIONS


REF. 330016
ST RED UHJ TORX 25

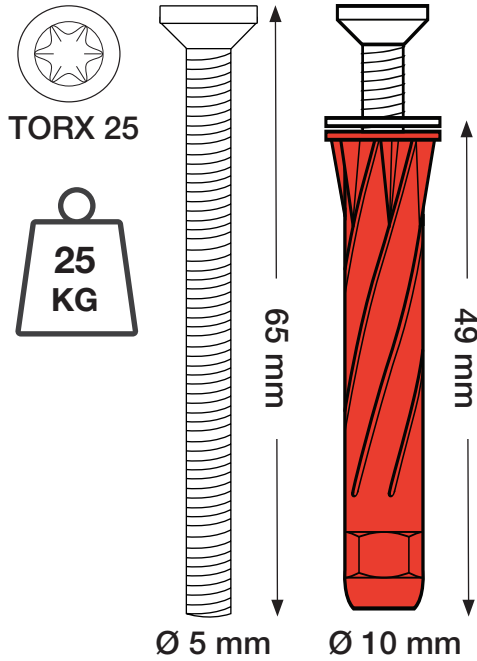


REF. 330018
ST RED UHJ TORX 25

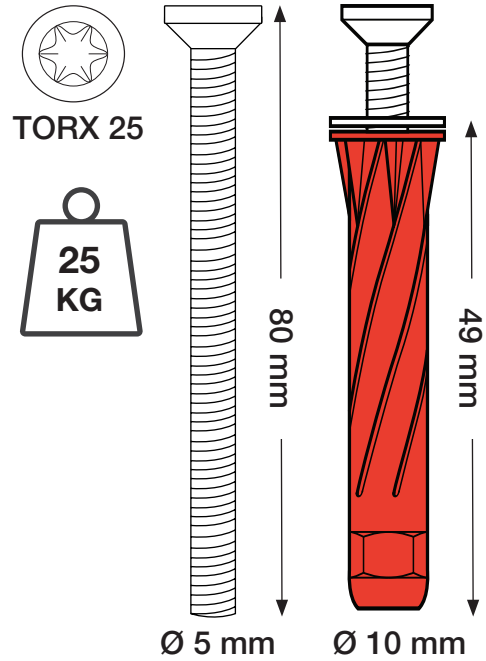

REF. 330021
ST RED COLLUM TORX 25

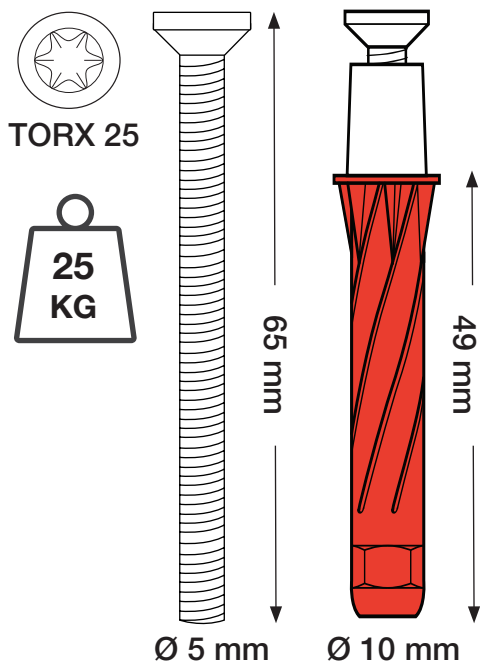


REF. 330026
ST RED EYE*

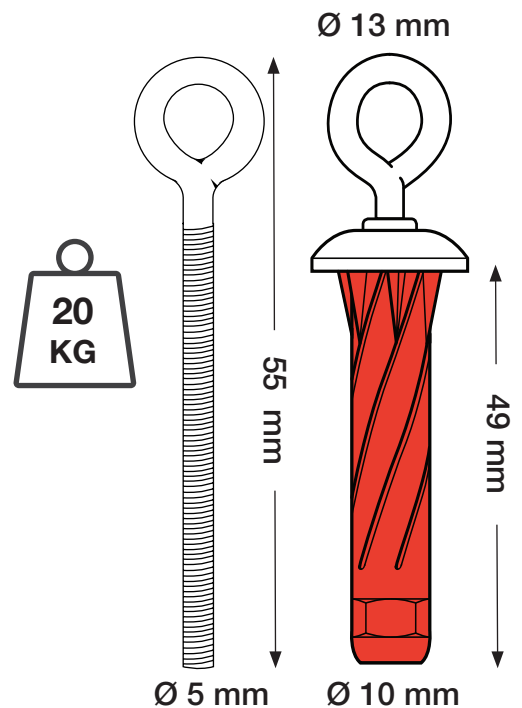

*If load recommendations not applied, eye may open.


DIMENSIONS

REF. 330031
ST RED HOOK*

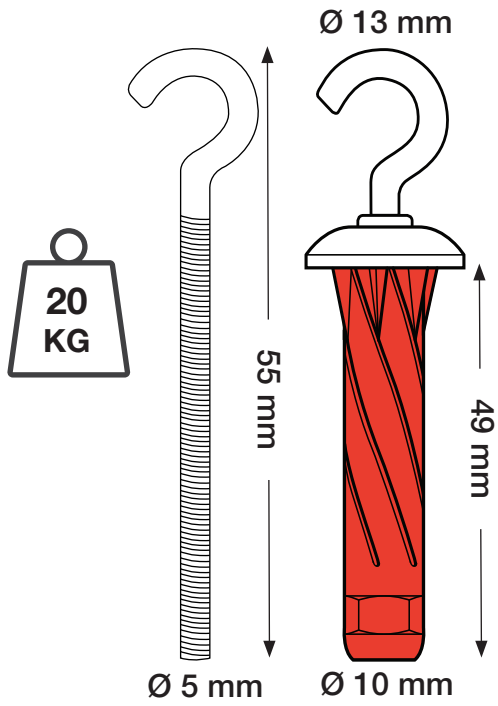

*If load recommendations not applied, hook may open.

REF. 330036
ST RED ANGLE*

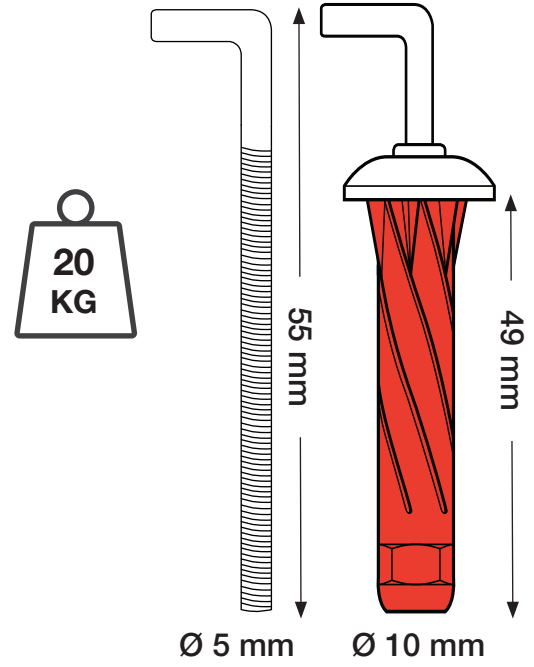

*If load recommendations not applied, angle may bend.